


dozvoljeno odstupanje slobodnih kota JUS M.A1.410 za mere uglova

| | |
|---|-----------------------------|
| područje nazivnih mera u mm (dužina kraćeg kraka) | 20-400 na |
| do 10 na | 50-120 na |
| 10-15 na | min 100 mm |
| sljep 100 mm | min 100 mm |
| ±10 | ±1.8 ±30 ±0.9 ±0.6 ±10 ±0.3 |

dozvoljeno odstupanje slobodnih mera JUS M.A1.410 za du inske mere

| | |
|------------------------------------|-----------|
| područje nazivnih mera | 1000-2000 |
| 6-30 | 315-1000 |
| 30-120 | 120-315 |
| ±0.1 ±0.1 ±0.2 ±0.3 ±0.5 ±0.8 ±1.2 | |

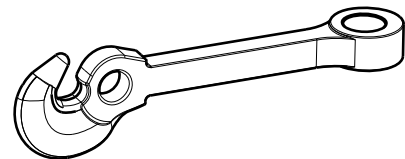

Napomena:
Nedefinisani radijusi R=2mm

| | | | | | | | | | |
|---------|--------|-------------------------------|-----|----------------------------------|----------------------|---------|-------------|------|------|
| deo za: | | Deutsche Bahn DB | | Izdav. | | | | | |
| | | ISO 2768 - m DIN 8570 - BF | | Datum | | | | | |
| | | DIN ISO1302 | | Razmera: | 1:5 | | Težina (kg) | 28.1 | |
| | | | | Materijal | according to UIC 825 | | | | |
| | | | | Naziv | | | | | |
| | | | | Kuka tip B (Draw hook type B) | | | | | |
| | | | | Crtež br. | | | | | List |
| | | | | Ž01.002.02 | | | | | L |
| St.i. | Izmene | Datum | Ime | veza sa: | | Br.otk. | Zamena za | | |